



### Profile View

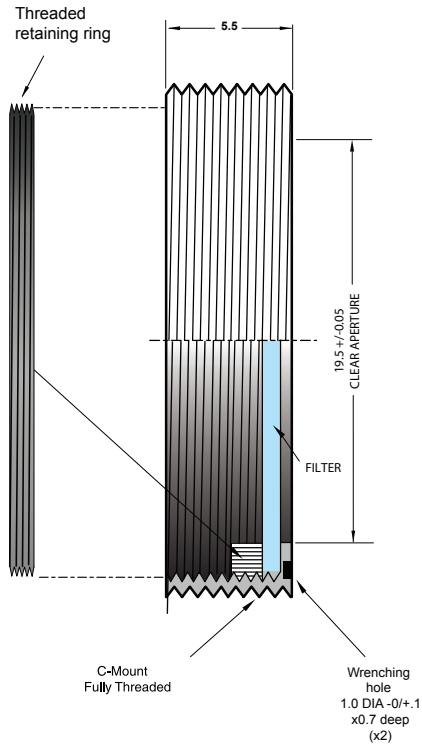

### Front View

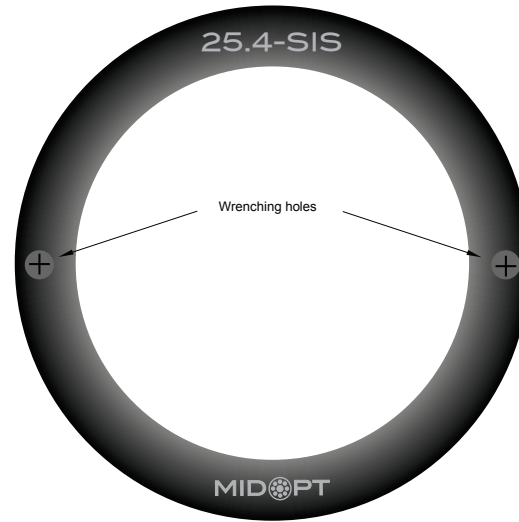

Wrench  
(Wrench Included)

#### NOTES:

1. Filter mount and retaining ring are black anodized aluminum.
2. This threaded filter screws into any C-mount camera so it is positioned directly in front of the sensor. Wrenching slots on the retaining ring aid in threading the filter into the camera body. A lens spanner wrench, pointed object or the upper anvils of a pair of vernier calipers can be used as wrenching tools. After installing the filter, the lens is threaded into the camera and the filter then sits immediately behind the lens.
3. Do not scale drawing. All dimensions are in mm.



**Machine Vision Filters, Lenses and Accessories**  
322 Woodwork Lane, Palatine IL 60067  
P: 847-359-3550 | info@midopt.com  
www.midopt.com

# M25.4-SIS

JANUARY 2017